


# WP400-3 Probe

## 1 Hz - 400 kHz



- Electric & Magnetic field measurement
- Isotropic & True RMS measurement
- Spectrum analysis probe
- Measurements in accordance with International Standards

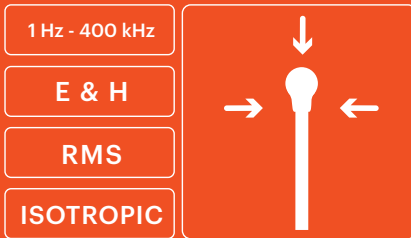

### IEC/EN 62233

Household appliances and similar apparatus: Measurement methods for electromagnetic fields with regard to human exposure.

### IEC/EN 62822

Electric welding equipment: Assessment of restrictions related to human exposure to electromagnetic fields.

### IEC/EN 62311

Assessment of electronic and electrical equipment for which no dedicated product- or product family standard regarding human exposure to electromagnetic fields applies.



## Technical Specifications

	Electric Field	Magnetic Field
<b>Sensor type</b>	Isotropic electrode	Isotropic 3 cm <sup>2</sup> coils
<b>Frequency range</b>	1 Hz - 400 kHz	1 Hz - 400 kHz
<b>Field Strength Mode</b>		
<b>Measurement range</b>	10 V/m to 400 kV/m	200 nT - 50 mT (100 Hz - 10 kHz) · Upper range increases linearly with decreasing frequency below 100 Hz. · Upper range decreases linearly with increasing frequency above 10 kHz.
<b>Graphical display</b>	RMS, Axis Values, AVG, MAX, MIN, PEAK, RMS time graph	
<b>Peak value</b>	digital realtime	digital realtime
<b>Resolution</b>	< 4 mV/m above 8 Hz	< 0.3 nT (at 50 Hz) and < 0.15 nT above 100 Hz
<b>Noise level</b>	< 10 V/m (10 Hz - 400 kHz)	< 200 nT (10 Hz - 400 kHz)
<b>Typical Uncertainty (10 Hz - 100 kHz) (1)</b>	0.67 dB	0.60 dB
<b>Weighted Peak Method mode</b>		
<b>Measurement range</b>	200 % (min)	200 % (min)
<b>Graphical display</b>	PEAK (%), AXIS VALUES (%), AVG (%), MAX (%), MIN (%), RMS (%), Time graph	
<b>Standards / Limits</b>	EU Directive 2013/35/EU, FCC/IEEE, Safety Code 6, ICNIRP 1998 workers, ICNIRP 2010 workers, BGV B11 Easy software update to future modifications and to other limits.	
<b>Typical Uncertainty (10 Hz - 100 kHz) (1)</b>	0.67 dB	0.60 dB



WP400-3\_EN\_1701\_v1.0

# WP400-3 Probe

## 1 Hz - 400 kHz



### Technical Specifications

	Electric Field	Magnetic Field
<b>FFT Mode</b>	Frequency analysis, total field and axis	
<b>Measurement range</b>	40 mV/m – 400 kV/m	2 nT - 50 mT (100 Hz - 10 kHz) · Upper range increases linearly with decreasing frequency below 100 Hz. · Upper range decreases linearly with increasing frequency above 10 kHz.
<b>Graphical display</b>	Frequency analysis, total field and axis	
<b>SPAN (Resolution)</b>	400 Hz (1 Hz) - 4 kHz (10 Hz) - 40 kHz (100 Hz) - 400 kHz (1 kHz)	
<b>Noise level</b>	< 40 mV/m	< 1.8 nT
<b>FFT</b>	1024 point FFT	
<b>General Specifications</b>		
<b>Isotropy</b>	± 5 %	± 4 %
<b>Temperature deviation [typ. at 60 Hz] (referred to 25 °C, 50 % relative humidity)</b>	- 0.005 dB/°C (- 15 °C to 40 °C)	- 0.003 dB/°C (- 15 °C to 25 °C) + 0.003 dB/°C (25 °C to 40 °C)
<b>Damage level</b>	> 600 kV/m	> 5000 mT up to 60 Hz Damage level decreases linearly with increasing frequency above 60 Hz
<b>Linearity</b>	± 1 % (typ.) ± 2 % (max.)	
<b>Weight</b>	125 g	
<b>Probe size</b>	275 x 33 mm Ø	

(1) Total, counting isotropy, temperature deviation, resolution, frequency response, linearity, repeatability.



Product specifications and descriptions in this document subject to change without notice